


Blaze King Briarwood II Fresh Air Kit & Mobile Home Kit (#Z1526) Installation Instructions

This kit is intended to bring fresh air for combustion through the floor/hearth. Special care should be paid when drilling holes....measure twice drill once. This kit includes:

- (1) #Z1539 (Fresh Air Cover Box) with #10 x 3/8" sheet metal screws
- (1) #FLPLATE3S (Floor Flange with Rodent Guard)
- (4) #8 x 1 1/4" wood screws with 1/4" flat washers
- (2) #10 x 3/8" sheet metal screws (1) 6" dia. x 24" galvanized pipe
- (2) 3" lag screws with 1/4" flat washers




This is a rear view of the Briarwood II, sitting on a raised platform for illustration purposes only. Note the Warnock Hersey label is attached to the pedestal rear cover plate. As you can see, fresh air for combustion enters the damper area located here.

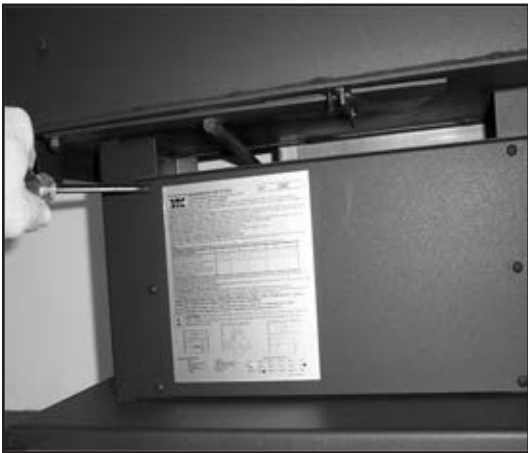


Using a Robertson bit driver, please remove the six cover plate screws. Take care to not damage the plate with the Warnock Hersey label and retain screws for reinstallation later.

With the pedestal rear cover plate removed, you'll see the fresh air hole that was cut at the factory. Using a marker, locate the area in hearth/floor to be removed for the inlet.




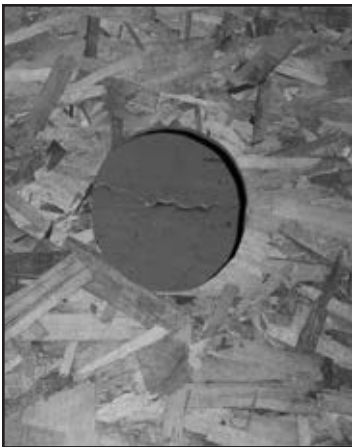

With stove off the hearth and having cut hole for fresh air inlet, position the floor flange with rodent guard in hole. * If access under the floor space is difficult or limited, you may wish to read instruction on page 4 now regarding installation of 6" x 24" pipe.

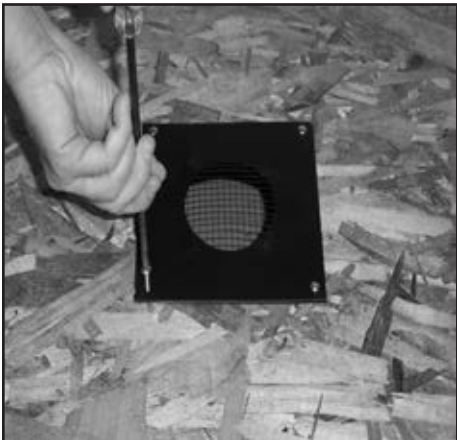

Secure the floor flange with rodent guard using the four enclosed 1 1/4" screws and washers to floor/hearth. *Many installers prefer to locate the floor flange with rodent guard through the floor and place hearth pad with hole directly over fresh air plate. Only a 3" hole is then required in the hearth pad.

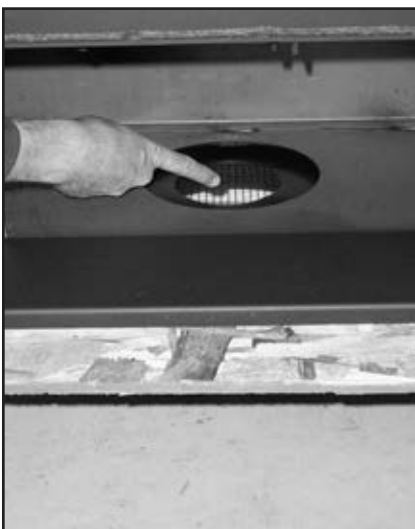

Reposition stove over floor flange with rodent guard. At this point you can also secure the stove to the hearth using the supplied 3" lag screws with washers. Locate predrilled holes in base and install lag screws.



Reinstall the rear pedestal cover plate using the six screws removed earlier.



Unwrap fresh air cover box supplied with kit. Using supplied 3/8" screws, slide box inside welded tabs located on rear of the stove. NOTE: The fresh air cover box is designed to fit *inside* welded tabs.



Secure the fresh air cover box with (2) supplied 3/8" screws. Note the cover box is inside the welded tab on rear of stove.



Please note the nice clean fit of the fresh air cover box to rear of stove. With the installation of the fresh air cover box, combustion air will now be drawn through the floor fresh air inlet.



Access under the floor area and install 6" x 24" galvanized pipe supplied with unit. Make certain the open end of pipe remains clear of obstruction and does not make contact with soil. 6" or more relief keeps small critters from reaching the pipe.



Secure pipe to floor flange with rodent guard using the (2) supplied #10 x 3/8" sheet metal screws.



The job now completed!

Should you have any concerns when installing the Briarwood II fresh air/mobile home kit, you may contact us at the numbers below or visit with your Blaze King dealer.

In the USA call 509-522-2730
In Canada call 250-493-7444

