

Blaze King Royal Guardian Fresh Air Kit & Mobile Home Kit (#Z8300AA) Installation Instructions

This kit is intended to bring fresh air for combustion through the floor/hearth or the wall. Special care should be paid when drilling holes....measure twice drill once. This kit includes:

(1) #Z8317A (Outside Air Cap with rodent guard) with (2) #10 x 3/8" sheet metal screws

(1) #FLPLATE3 (Floor Flange)

(4) #8 x 1 1/4" wood screws with 1/4" washers (2) #10 x 3/8" sheet metal screws

(2) 1/4" x 3" Lag Bolts with 1/4" washers

(1) Length 3" dia. x 30" flex pipe complete with hose clamp

(1) Length 6" dia. x 24" galvanized pipe



This is a rear view of the Royal Guardian, sitting on a raised platform for illustration purposes only. The fresh air kit can be used for thru the floor or wall applications. These instructions can be applied to either application.




Remove the main air tube adapter from the packaging. Slide the adapter onto the bottom of the main air tube.

Once in place, screw the two (2) #10 x 3/8" sheet metal screws using a Robertson bit screw driver through the adapter into the main air tube. There are two predrilled holes, one on each side.




Position stove and locate position where 6" hole is to be made. Trace the ring of the floor flange and cut so as to remove the mark, ensuring a nice fit.

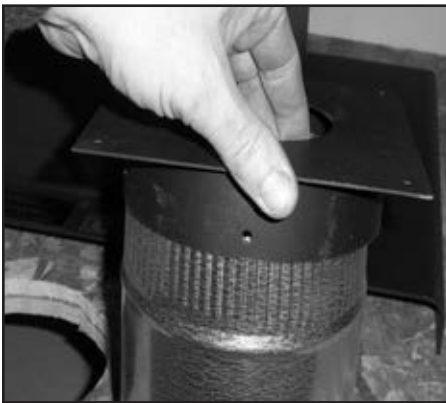

Included with this kit is a 24" length of 6" galvanized pipe. You can attach the pipe at this time if the access under the floor is limited. Use the enclosed #10 x 3/8" sheet metal screws to make the connection secure.



Using the supplied screws, secure the floor flange to the floor or wall at this time. Slide the 3" flex tube onto the adapter and secure with enclosed hose clamp. Run the 3" flex inside the 6" galvanized pipe secured earlier.

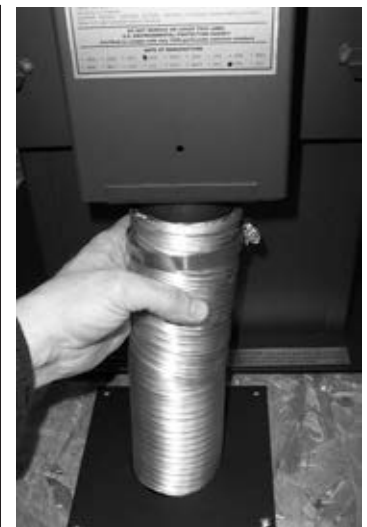

For mobile home applications please anchor the stove using the enclosed 3" lag screw with 1/4" washers. The approved location, as shown here is located at the rear of the stove. For added safety, remove ash pan and drill a second 1/4" hole near front of the base. A second 3" lag screw has been included for this purpose.



Good Job!

Should you have any concerns when installing the Royal Guardian fresh air/mobile home kit, you may contact us at the numbers below or visit with your Blaze King dealer.

In the USA call 509-522-2730

In Canada call 250-493-7444